


Plato Monitor

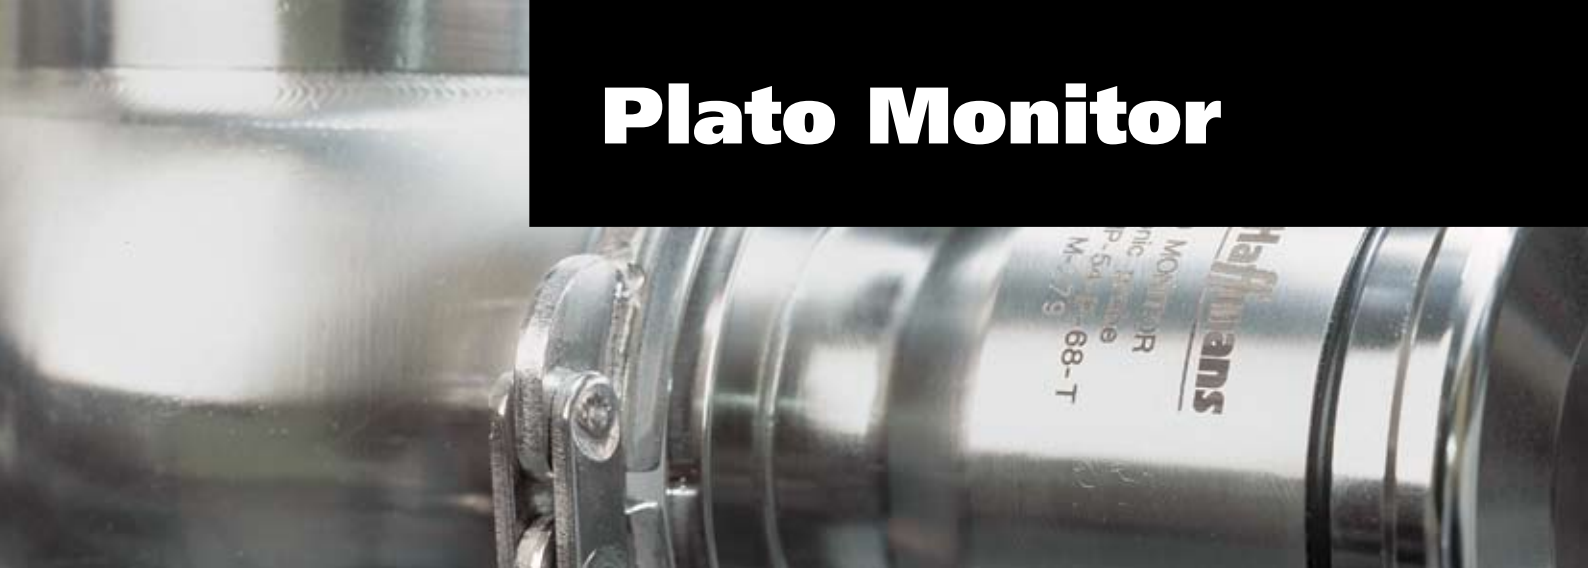

Plato Monitor

General product information

Accurate measurement of the original gravity of beer is essential in various parts of the brewing process. The Haffmans Plato Monitor offers excellent accuracy, using proven ultrasound technology, in combination with a new, user-friendly control unit. Whether it is employed as a quality control tool, or for optimization of the beer blending process, the Haffmans Plato Monitor puts you in complete control of the original gravity of your product.

The new control unit features up to 255 preset recipes, eliminating the need for calibration when switching to a different product. It also includes a new self-analysis function, which enables inline zero-point calibration, and allows the device to compensate for unusual occurrences, such as gas bubbles. Furthermore, it offers improved trend analysis of measured values, improved accuracy, and remote control of the product selection.

The Haffmans Plato Monitor is a maintenance free, compact system with a user-friendly touch screen control panel. The hygienic and reliable design, which can be easily integrated into your existing control cabinet, guarantees a long service life. The quality and reliability of the Haffmans Plato Monitor is underlined by many references around the world.



PLM

Plato Monitor



Benefits

- Excellent accuracy and reliability
- Easily integrated in your existing brewery control system
- User-friendly touch screen control panel
- Maintenance free operation

Applications

- Quality Control
 - in the brewhouse
 - after filtration
 - before filling
- Optimizing Original Gravity
 - during blending

Technical Data

Measuring Range:	0 – 20 °Plato
Accuracy:	± 0.03 °Plato
Temperature:	max 160 °C
Pressure:	max 16 bar
Output O.G.:	4 – 20 mA
Output Temp:	4 – 20 mA
Input CO ₂ analyzer:	4 – 20 mA
Input product selection:	24V, 6 bit
Power supply:	100-240 VAC or 18-36 VDC

Ultrasonic Probe

Connection:	Varivent®
Pipe diameter:	min. DN65
Protection class:	IP 68

Scope of Supply

- Ultrasonic probe
- Control unit
- Connection cable set
- Instruction Manual



Haffmans BV

P.O. Box 3150 NL-5902 RD Venlo, The Netherlands

T +31 77 323 23 00 • F +31 77 323 23 23

E info@haffmans.nl • I www.haffmans.nl

Haffmans BV reserves the right to make changes in the technical specifications at any time.

PLM